



# Automatic Finisher Series AFJ-24S




## *Fancy, Efficiency, Accuracy*

The GCC AFJ-24S provides labor free operation with guaranteed precise contour cutting that satisfy diverse needs for custom labels, transfer decals and many more.




### Feature

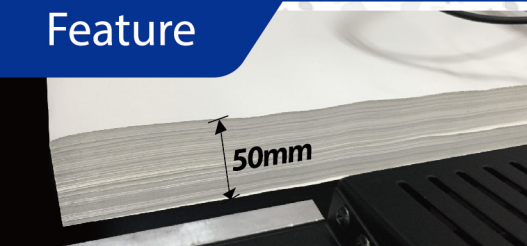

Media stacking up to 50mm




Support media standard up to B3 size

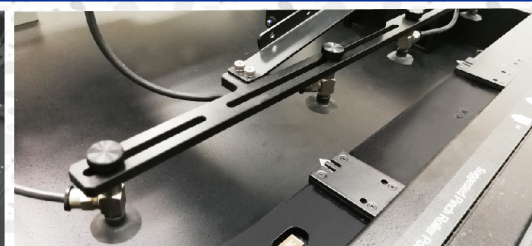

Suction cap for automated sheets feeding process




Precise contour cutting on printed media

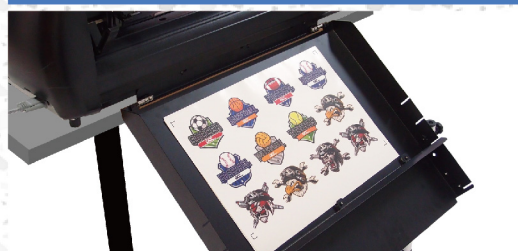

Media basket collects completed cutting sheets



Single sheet feeding guaranteed

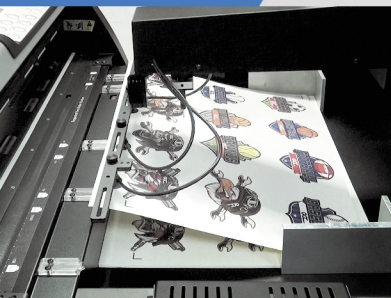

**Media loading ▶ Mark detecting ▶ Contour cutting ▶ Media collecting**

## Specification

<b>Model</b>	<b>AFJ-24S</b>
<b>Supported media size</b>	A4 (297 x 210 mm), SRA4 (320 x 235 mm), A3 (297 x 420 mm), SRA3 (320 x 450 mm), B3 (500 x 353 mm) (landscape orientation) Optional: B2 (500 x 707 mm) A3+ (329 x 483 mm) (portrait orientation)
<b>Interface to PC</b>	USB 2.0 (Full Speed), Serial (RS-232C) and Ethernet
<b>Power source</b>	100 to 240 V AC (It is required three-prong outlet.)
<b>Operating environment</b>	Temperature: 15 to 30°C/60°F~86°F Humidity: 25 to 75 % RH (non-condensing)
<b>Dimensions</b>	Approx. 950 (W) x 1,080 (D) x 780 (H) mm
<b>Weight</b>	Approx. 40 kg (Cutter unit: 18 kg, Auto feeder unit: 22 kg)
<b>Cutter Unit</b>	<b>J5-61LX</b>
<b>Cutting speed</b>	Max. 1,530 mm/s (at 45° direction)
<b>Acceleration</b>	Max. 4.2 G
<b>Cutting force</b>	Max. 600 g
<b>Interface</b>	USB 2.0 (Full Speed), Serial (RS-232C) and Ethernet
<b>Power source</b>	100 to 240 V AC
<b>Power consumption</b>	Max. 110 watts
<b>Auto Feeder Unit</b>	<b>Auto Feeder</b>
<b>Supported media</b>	Width: 279 to 500 mm, Length: 210 to 700 mm (Extend to 700 mm length when the optional extension table are installed.) Up to 350 g/m <sup>2</sup>
<b>Capacity of supply tray</b>	250 Sheets @150 g/m <sup>2</sup> or up to 50 mm height (It varies by the material, thickness and condition of media.)
<b>Interface</b>	Serial (RS-232C)
<b>Power source</b>	AC adapter, 100 to 240 V AC, Approx. 60 VA at output power



[www.GCCworld.com](http://www.GCCworld.com)



GCC Headquarters	4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan	886-2-6616-6692	Fax : 886-2-2694-6875
GCC China	No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China	86-512-5726-1515	Fax : 86-512-5726-1518
GCC Europe B.V.	Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands	31-10-458-9367	Fax : 31-10-451-9874
GCC America, Inc	20453 E Valley Blvd. Walnut, CA 91789, USA	1-909-718-0248	Fax : 1-909-718-0251
		US & Canada Only	Toll Free: 1-888-284-5211